



DC-operated contactors KG3-..D.. to 11kW / AC3 with auxiliary contact suitable for electronic circuits

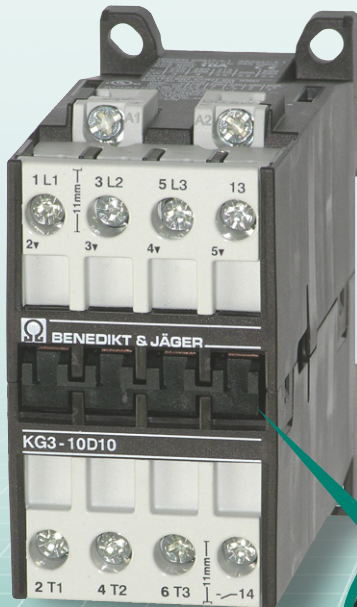

- auxiliary contact suitable for electronic circuits (17V, 5mA=)
- double contact for highest switching reliability for difficult ambient conditions
- NO aux. contact according to IEC 60947-4-1, Annex F
- Modernized Type KG3-..D.. with improved contact reliability compared to KG3-..A.. (massive aux. contact)
- direct control from PLC (⚡ 3W) with built-in coil suppressor
- coil terminal on top and bottom



New

Technical Data

Type "D"				KG3-10D...	KG3-14D...	KG3-18D...	KG3-22D...
Main Contact							
AC3		400V	kW	4	5,5	7,5	11
Auxiliary Contact	suitable for electronic						
I _{th} /AC1			A	10	10	10	10
AC15		220-240V	A	3	3	3	3
UL				A600	A600	A600	A600
smallest load		17V	mA	5	5	5	5
Type "A"				KG3-10A...	KG3-14A...	KG3-18A...	KG3-22A...
Main Contact							
AC3		400V	kW	4	5,5	7,5	11
Auxiliary Contact	massive						
I _{th} /AC1			A	16	16	16	16
AC15		220-240V	A	12	12	12	12
UL				A600	A600	A600	A600
smallest load		24V	mA	100	100	100	100

Technische Änderungen vorbehalten

Benedict GmbH
Liebiggasse 7, A-1220 Vienna

Tel.: +43 1 251 51-0
Fax: +43 1 251 51-89

e-mail: sales@benedict.at
www.benedict.at

 **BENEDICT**
GMBH

DC-operated contactors KG3-..D.. to 11kW / AC3 with auxiliary contact suitable for electronic circuits

Dimensions

KG3-10D/A..
KG3-14D/A..
KG3-18D/A..
KG3-22D/A..

