

AUXILIARY CONTACT RH11(for R25,R40,R63), RH11-1(for R25VM)

Technical Data acc. to IEC/EN60947-4-1, IEC/EN60947-5-1, VDE 0660


	Type	RH11 RH11-1	
Auxiliary Contacts			
Rated insulation voltage U_i	V~	440	
Thermal rated current = I_{th}	40°C	10	
Ambient temperature	60°C	6	
Utilization category AC15			
Rated operational current I_e	220-240V	3	
	380-415V	2	
	440V	1,6	
Utilization category DC13			
Rated operational current I_e per pole	24-60V	2	
	110V	0,4	
	220V	0,1	
Short circuit protection			
Short-circuit current 1kA, contact welding not accepted, max. fuse size	gL (gG)	10	
Cable cross-sections			
Main connector	solid or stranded	mm ²	0,5-2,5
	flexible	mm ²	0,5-2,5
	flexible with multicore cable end	mm ²	0,5-1,5
Clamps per pole			1

Weight approx 0,026 kg




Symbol picture

Wiring diagram



Dimensions (RH11, RH11-1)

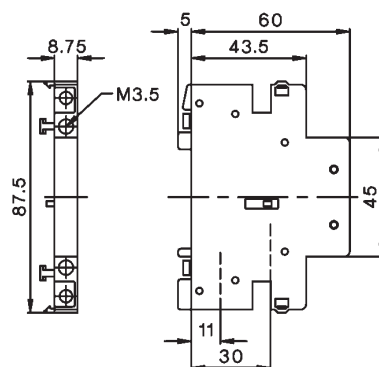

Technical data are subject to change without notice

Benedict GmbH
Lieblgasse 7, A-1220 Vienna

Tel.: +43 1 251 51-0
Fax: +43 1 251 51-89

e-mail: sales@benedict.at
www.benedict.at