

Modular Contactors R32-40

4-pole (+ Auxiliary Contact), 3TE, low noise

- 32A (AC1)
- High Power ratings, compact size, 3 modules (53mm)
- Climate resistant, ambient temperature: -40°C.. +60°C
- Switching indicator


New

Rated current	Heating Power		Motor	Type	
	AC1 230V 1~ kW	400V 3~ kW		NO NC	coil V~
400V AC1 A			AC3 400V 3~ kW		
32	9	22	11	R32-40	24
32	9	22	11	R32-40	230
32	9	22	11	R32-40-01	24
32	9	22	11	R32-40-01	230



		Typ	R32..
Main Contacts			
Rated insulation voltage U_i		V~	440
Rated operation voltage U_e		V~	440
Frequency of operations z	AC1, AC3	1/h	600
Mechanical life		$S \times 10^6$	1
Utilization category AC1 / AC7a, Switching of resistive load			
Rated operational current $I_e (=I_{th})$	open	at 60°C	A 32
Contact life		$S \times 10^6$	0,1
Minimum switch voltage		V/mA	24/100
Short time current		10s-current	A 184
Power loss per pole at $I_e/AC1$		W	3
Utilization category AC2 and AC3 / AC7b, Switching of three-phase motors			
Rated operational current I_e		A	23
Rated operational power		220V kW	5,5
		230-240V kW	6
		380-415V kW	11
Contact life		$S \times 10^6$	0,15
Power consumption of coils			
AC operated		inrush VA	33-45
		sealed VA	6-8
		W	2,6
Operation range of coils			
in multiples of control voltage U_c		-40°C to +40°C	0,85-1,1
Maximum ambient temperature			
		open °C	-40 bis +60
		enclosed °C	-40 bis +40
		°C	-50 bis +90
Storage			
Short circuit protection			
Max. fuse Coordination-type "1"		gL (gG) A	50
Rated short circuit current		"I _n " kA	3
		"I _q " kA	10

Wiring diagrams

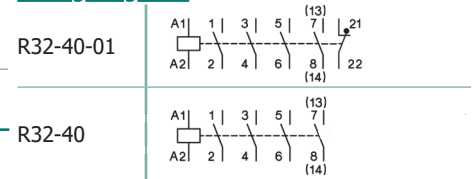


Weight

0,36kg


Coil voltages

R32-.. 230 220-240V 50Hz / 230-264V 60Hz
R32-.. 24 24V 50/60Hz

Cable cross-sections, screw driver, tightening torque

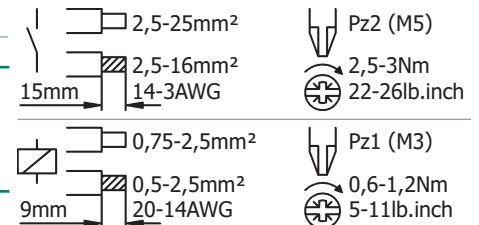

Dimensions

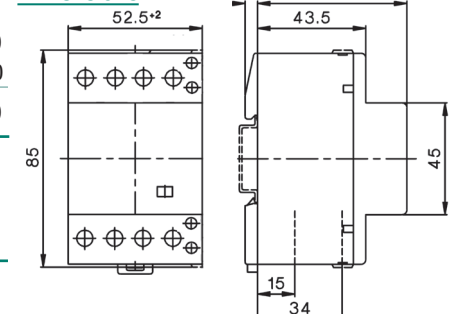

Technical data are subject to change without notice

Benedict GmbH
Lieblgasse 7, A-1220 Vienna
Tel.: +43 (1) 251 51-0
Fax: +43 (1) 251 51-89

e-mail: sales@benedict.at
www.benedict.at

