



■ Modular Contactors R40.., R63..

2-pole - 40A or 63A

- 40A or 63A (AC1)
- High power ratings, compact size, 2 modules (35mm)
- Climate resistant, ambient temperature: -40°C..+60°C
- Switching indicator


2-pole



Rated current	Heating Power ¹⁾			Motor	Type	Pack
	AC1	AC3	AC3			
400V	230V	400V	400V	AC3		
AC1	1~	3~	3~	3~		
A	kW	kW	kW			pcs.
40	9	-	-		R40-20 24	6
40	9	-	-		R40-20 230	6
63	14,3	-	-		R63-20 24	6
63	14,3	-	-		R63-20 230	6

Ratings	R40	R63
Incandescent lamps	25A / 5700W	35A / 8000W
Fluorescent lamps	32A / 3400W	52A / 5500W
Fluorescent lamps (dual-connection)	34A / 6300W	54A / 10000W
Fluorescent lamps (parallel compensated)	16A / 3100W	25A / 5100W

Dimensions

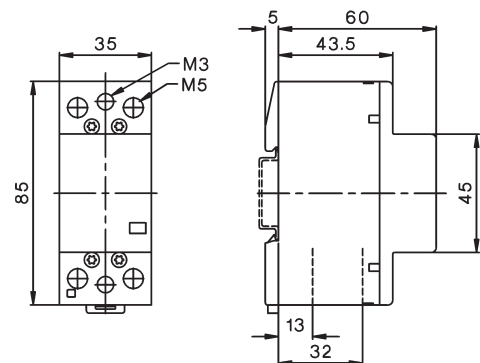

Power consumption of coils

AC operated	inrush	VA	20 - 25
	sealed	VA	4 - 6
		W	1,5 - 2,5

Cable cross section

Main connector	solid or stranded	mm ²	2,5 - 25
	flexible	mm ²	2,5 - 16
	Clamps per pole		1

Magnetic coil	solid or stranded	mm ²	0,75 - 2,5
	flexible	mm ²	0,5 - 2,5
	flexible with multicore cable end	mm ²	0,5 - 1,5
	Clamps per pole		1

Technical data are subject to change without notice